


STANDING SEAM FLASHING

KSS

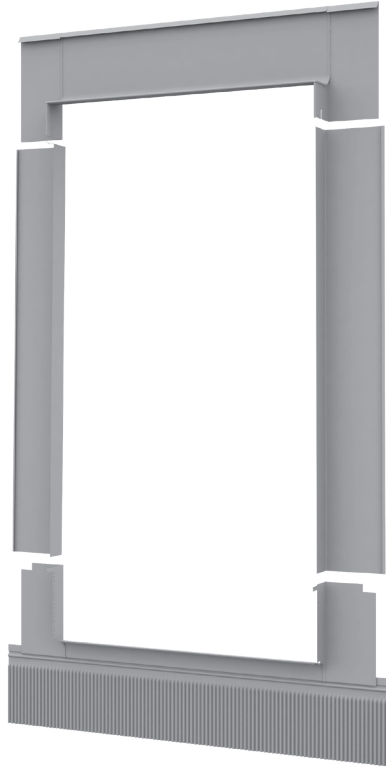

APPLICABLE

- In roof pitch range of 15°-90°
- For special steel roofing materials with standing seam connections
- Developed to fit "click system" steel roofing

FEATURES


- Perfect watertightness
- Easy installation
- Weather and UV ray resistant
- Lead free components
- Packaging contains all the necessary components for the installation. No additional purchase is needed for the installation.

MATERIAL

- Aluminium
- Powder coated grey, RAL7043

AVAILABLE SIZES [cm]

C2A	C4A	F6A	M4A	M6A	M8A	M10A	P6A	P8A	S6A
55x78	55x98	66x118	78x98	78x118	78x140	78x160	94x118	94x140	114x118



www.dakea.com

