
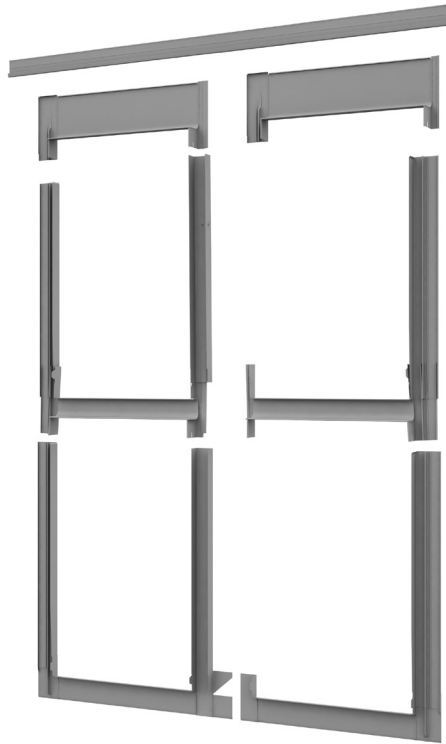


COMBI SLATE FLASHING

SCX



APPLICABLE

- In roof pitch range of 15-90°
- Suitable for slates and flat roofing, up to 8mm (max overlapped thickness is 16 mm)
- For roof window distance of 100 mm

FEATURES


- Perfect watertightness
- Easy installation
- Weather and UV ray resistant
- Lead free components
- One-piece side elements
- Without apron to ensure a perfect seal to flat roofing materials

MATERIAL

- Aluminium
- Powder coated grey, RAL7043

AVAILABLE SIZES [cm]

C2A	C4A	C6A	F4A	F6A	M4A	M6A	M8A	M10A	P6A	P8A	S6A	S8A	U4A	U8A
55x78	55x98	55x118	66x98	66x118	78x98	78x118	78x140	78x160	94x118	94x140	114x118	114x140	134x98	134x140



www.dakea.com



TECHNICAL SPECIFICATION

	13	2	46	5	7
E 100 mm	SCX C2A 13E	SCX C2A 2E	SCX C2A 46EE	UCX C2A 5EE	SCX C2A 7E
	SCX C4A 13E	SCX C4A 2E	SCX C4A 46EE	UCX C4A 5EE	SCX C4A 7E
	SCX C6A 13E	SCX C6A 2E	SCX C6A 46EE	-	SCX C6A 7E
	SCX F4A 13E	SCX F4A 2E	SCX F4A 46EE	UCX F4A 5EE	SCX F4A 7E
	SCX F6A 13E	SCX F6A 2E	SCX F6A 46EE	UCX F6A 5EE	SCX F6A 7E
	SCX M4A 13E	SCX M4A 2E	SCX M4A 46EE	UCX M4A 5EE	SCX M4A 7E
	SCX M6A 13E	SCX M6A 2E	SCX M6A 46EE	UCX M6A 5EE	SCX M6A 7E
	SCX M8A 13E	SCX M8A 2E	SCX M8A 46EE	UCX M8A 5EE	SCX M8A 7E
	SCX M10A 13E	SCX M10A 2E	SCX M10A 46EE	UCX M10A 5EE	SCX M10A 7E
	SCX P6A 13E	SCX P6A 2E	SCX P6A 46EE	UCX P6A 5EE	SCX P6A 7E
	SCX P8A 13E	SCX P8A 2E	SCX P8A 46EE	UCX P8A 5EE	SCX P8A 7E
	SCX S6A 13E	SCX S6A 2E	SCX S6A 46EE	UCX S6A 5EE	SCX S6A 7E
	SCX S8A 13E	SCX S8A 2E	SCX S8A 46EE	UCX S8A 5EE	SCX S8A 7E
	SCX U4A 13E	SCX U4A 2E	SCX U4A 46EE	UCX U4A 5EE	SCX U4A 7E
	SCX U8A 13E	SCX U8A 2E	SCX U8A 46EE	UCX U8A 5EE	SCX U8A 7E

