

# VIEW WHITE

## KHV HIGH PIVOT ROOF WINDOW



VARIANT	1010
<b>PANE</b>	
Construction	33.2-14-4H
Double glazing	24 mm
Low E	✓✓
Gas	Argon
Toughened	✓
Laminated	✓
$U_g$ (W/m <sup>2</sup> K)	1.0
Total solar energy transmittance	0.52
<b>WINDOW</b>	
$U_w$ (W/m <sup>2</sup> K)	1.3
Water tightness	E1500
Air permeability	Class 4
Resistance to wind load	Class C4*
Sound reduction	34 (-1,-4) dB
Ventilation valve	✓
<b>COLOUR</b>	
White painted	✓

\* M8A, M10A: npd (no performance data)

### APPLICABLE

- In public and domestic buildings
- In heated, inhabited rooms
- In roof pitch range of 15-55°
- Suitable on all common roofings with proper flashing

### FEATURES

- High pivot
- Gas strut assisted
- Laminated internal pane
- Two passive ventilation positions via handle
- Ventilation valve
- Easy installation
- 20 (10+10) year guarantee
- Not compatible with solar roller shutter (SSR)

### MATERIAL / WOOD AND FINISHING

- Kiln-dried laminated pine wood
- Timber from FSC certified forests
- Fungicide protection
- Water-based white paint

### COVER PARTS

- Aluminium, lacquered, RAL 7043

### HANDLE

- New, ergonomically designed moulded zinc handle, lacquered

### HINGE

- High pivot



# TECHNICAL DATA

## MEASURES [cm]

CODE	NOMINAL SIZE	FRAME EXTERNAL SIZE		PANE SIZE		VISIBLE GLASS		
		WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	EFFECTIVE LIGHT AREA m <sup>2</sup>
KHV C4A	55x98	55	97,8	39,8	84,9	37,3	79	0.295
KHV F6A	66x118	66	117,8	50,8	104,9	48,3	99	0.478
KHV M4A	78x98	78	97,8	62,8	84,9	60,3	79	0.476
KHV M6A	78x118	78	117,8	62,8	104,9	60,3	99	0.597
KHV M8A	78x140	78	139,8	62,8	126,9	60,3	121	0.729
KHV M10A	78x160	78	159,8	62,8	146,9	60,3	141	0.850

## FLASHING COMPATIBILITY TABLE


## ACCESSORIES COMPATIBILITY TABLE

CODE	SLATE FLASHING	TILE FLASHING	UNIVERSAL FLASHING	BLACKOUT BLIND	ANTI HEAT BLIND	SOLAR ROLLER SHUTTER
KHV C4A	KSF C4A	KTF C4A	KUF C4A	DUA C4A	MIA CXA	SSR C4A
KHV F6A	KSF F6A	KTF F6A	KUF F6A	DUA F6A	MIA FXA	SSR F6A
KHV M4A	KSF M4A	KTF M4A	KUF M4A	DUA M4A	MIA MXA	SSR M4A
KHV M6A	KSF M6A	KTF M6A	KUF M6A	DUA M6A	MIA MXA	SSR M6A
KHV M8A	KSF M8A	KTF M8A	KUF M8A	DUA M8A	MIA MXA	SSR M8A
KHV M10A	KSF M10A	KTF M10A	KUF M10A	DUA M10A	MIA MXA	SSR M10A

Please check the combi flashing compatibility table as well.

## PANE CONSTRUCTION

### ENERGY SAVING INSULATED GLASS

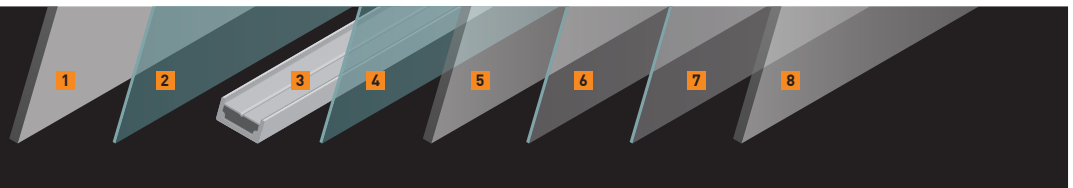

1: 4 mm toughened safety glass 2, 4: Low-E coating [reflects heat] 3: Argon gas filled cavity 5, 8: 3 mm float glass 6, 7: Two layers of tear resistant foil

## AVAILABLE SIZES [cm]

C4A	F6A	M4A	M6A	M8A	M10A
55x98	66x118	78x98	78x118	78x140	78x160



www.dakea.com

