


UNIVERSAL TWIN FLASHING FOR VERTICA ENERGY WINDOWS

UBN

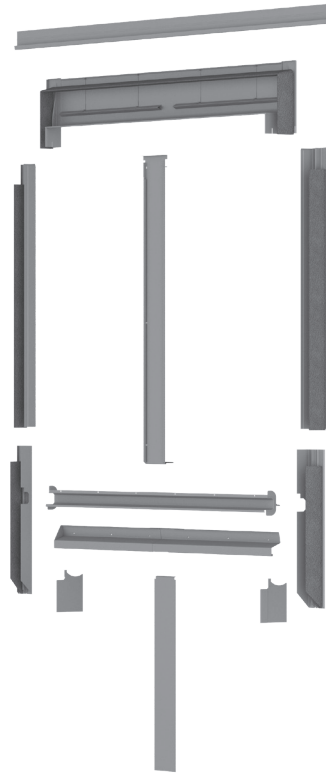

APPLICABLE

- Suitable for side by side installation of two VERTICA ENERGY (type KAN) roof windows
- In roof pitch range of 15°-55°
- For high profiled roofings (16-120 mm)
- For roof window distance of 120 mm
- For both 'long overhang boxed eaves' and 'flush eaves detail' solutions

FEATURES

- Perfect watertightness
- Easy installation
- Weather and UV ray resistant
- Lead free
- Foam gasket

MATERIAL

- Aluminium
- Powder coated grey, RAL 7043

AVAILABLE SIZES* [CM]

| | | | |
|------------|------------|------------|-------------|
| | | | |
| M4A | M6A | M8A | M10A |
| 78x98 | 78x118 | 78x140 | 78x160 |

*According to the upper/pitched windows



Long overhang boxed eaves



Flush eaves detail

www.dakea.com

