

CONTROL+

KFE U SKYLIGHT



APPLICABLE



- In public and domestic buildings
- In unheated, uninhabited spaces like attics, garages, etc.
- In roof pitch range of 15-60°
- Suitable for all common roofing material, up to 90 mm profile height

FEATURES

- Preinstalled roofing foil collar
- Opening restrictor
- The sash can be fixed in 90° open position
- Preinstalled flashing with apron
- Preinstalled foam collar for roofing connection
- Weather and UV resistant
- 14 mm double insulating glazing [3-8-3]
- Galvanized steel handle with two ventilation positions
- 5 years guarantee
- Simple and quick installation

MATERIAL

- Frame: Kiln-dried, FSC certified pine wood
- Fungicide protection
- Aluminium sash profile
- Lead-free, double layer, easy to shape bottom apron
- Available colour variants:
- Grey RAL 7043

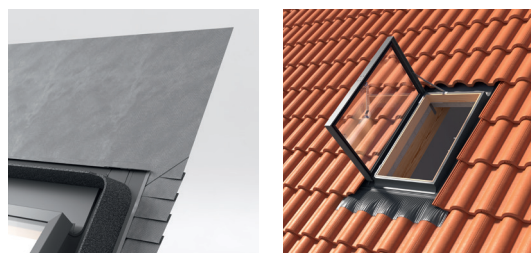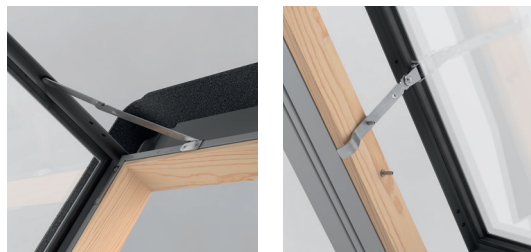

AVAILABLE SIZES [CM]

| | |
|---------------------|-------------------|
| | □ |
| Product type | KFE 4573 U |
| Size** | 45x73 |
| Opening options | * |

* Factory default opening

** Given sizes refer to the external dimensions of the wooden frame



The mark of responsible forestry



www.dakea.com

