


# ACCESS ENERGY

## KXL SIDE-HUNG ROOF EXIT WINDOW



VARIANT	1600
<b>PANE</b>	
Construction	33.2-10-3HS-10-4H
Triple glazing	33 mm
Low E	✓✓
Gas	Argon
Toughened	✓
$U_g$ (W/m <sup>2</sup> K)	0.81
Total solar energy transmittance	0.54
<b>WINDOW</b>	
$U_w$ (W/m <sup>2</sup> K)	1.1
Water tightness	E1350
Air permeability	Class 3
Resistance to wind load	Class C4
Sound reduction	36 (-1,-3) dB
<b>COLOUR</b>	
Natural wood	✓



NEXT 20  
GUARANTEE



MASTER WOOD



MAX PROTECT



THERMOSTAT



ENERGY +

### APPLICABLE

- In public and domestic buildings
- In heated, inhabited rooms
- In roof pitch range of 15°-85°
- Suitable on all common roofings with proper flashing

### FEATURES

- Side-hung (default right from outside, can be changed to left)
- Extra sliding gasket
- ENERGY+ - Triple glazing
- THERMOSTAT - Extra heat reflecting coating
- Toughened external and laminated internal glass
- 10 years guarantee
- Easy installation

### MATERIAL


- Kiln-dried laminated pine wood
- Timber from FSC certified forests
- Fungicide protection
- Double layer water-based lacquer

### COVER PARTS

- Aluminium, grey, RAL 7043

### HANDLE

- New, ergonomically designed moulded zinc handle, lacquered



## TECHNICAL SPECIFICATION

MEASURES [cm]								
CODE	NOMINAL SIZE	FRAME EXTERNAL SIZE		PANE SIZE		VISIBLE GLASS		
		WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	EFFECTIVE LIGHT AREA m <sup>2</sup>
KXL F4A	66x98	66	97.8	50.8	84.9	48.3	79	0.382
KXL F6A	66x118	66	117.8	50.8	104.9	48.3	99	0.478
KXL M4A	78x98	78	97.8	62.8	84.9	60.3	79	0.476
KXL M6A	78x118	78	117.8	62.8	104.9	60.3	99	0.597
KXL M8A	78x140	78	139.8	62.8	126.9	60.3	121	0.730
KXL P6A	94x118	94	117.8	78.8	104.9	76.3	99	0.755

FLASHING COMPATIBILITY TABLE (ACCORDING TO PROFILE HEIGHT OF ROOFING MATERIAL)							
SIZE CODE	SLATE with soaker elements 0-16 mm (2x8 mm)	SLATE with one-pice side element 0-16 mm (2x8 mm)	TILE (16-50 mm)	UNIVERSAL (16-120 mm)	UNIVERSAL for 18 mm TWIN combi (16-120 mm)	COMBI Universal (16-120 mm)	COMBI Slate 0-16 mm (2x8mm)
KXL F4A	KSF F4A	KLS F4A	KTF F4A	KUF F4A	-	•	•
KXL F6A	KSF F6A	KLS F6A	KTF F6A	KUF F6A	-	•	-
KXL M4A	KSF M4A	KLS M4A	KTF M4A	KUF M4A	UBX M4A 18	•	•
KXL M6A	KSF M6A	KLS M6A	KTF M6A	KUF M6A	UBX M6A 18	•	•
KXL M8A	KSF M8A	KLS M8A	KTF M8A	KUF M8A	UBX M8A 18	•	•
KXL P6A	KSF P6A	KLS P6A	KTF P6A	KUF P6A	-	•	•

Please check the necessary combi flashings according to the installation.

INTERNAL BLIND COMPATIBILITY TABLE			
SIZE CODE	BLACKOUT	ROLLER	VENETIAN
KXL F4A	DUA F4A	RHA FXA	PAA F4A
KXL F6A	DUA F6A	RHA FXA	PAA F6A
KXL M4A	DUA M4A	RHA MXA	PAA M4A
KXL M6A	DUA M6A	RHA MXA	PAA M6A
KXL M8A	DUA M8A	RHA MXA	PAA M8A
KXL P6A	DUA P6A	RHA PXA	PAA P6A



### ACCESSORIES

Only internal blinds can be used for shading purpose!


External awning, roller shutter and electric are not compatible with the product.

FREE OPENING AREA [cm]			
CODE	NOMINAL SIZE	FREE OPENING AREA	
		WIDTH	HEIGHT
KXL F4A	66x98	54	90
KXL F6A	66x118	54	110
KXL M4A	78x98	66	90
KXL M6A	78x118	66	110
KXL M8A	78x140	66	132
KXL P6A	94x118	82	110



### FREE OPENING AREA

Easy to reach roof area thanks to the side-hung operation.

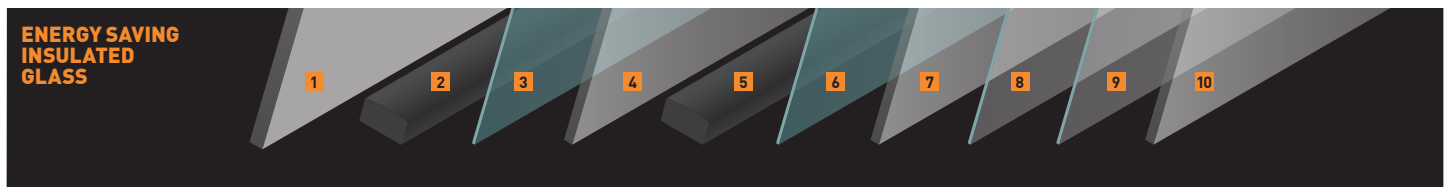

1: 4 mm toughened safety glass 2, 5: Argon gas filled cavity 3, 6: Heat reflecting coating 4: 3 mm heat-strengthened glass 7, 10: 3 mm float glass 8, 9: Two layers of tear resistant foil

### AVAILABLE SIZES [CM]

F4A	F6A	M4A	M6A	M8A	P6A
66x98	66x118	78x98	78x118	78x140	94x118



CE<sup>23</sup>  
EN 14351-1: 2006  
+A2: 2016

www.dakea.com

