

VIEW

KHV HIGH PIVOT ROOF WINDOW



VARIANT	1000
PANE	
Construction	33.2-14-4H
Double glazing	24 mm
Low E	✓✓
Gas	Argon
Toughened	✓
Laminated	✓
U_g (W/m ² K)	1.0
Total solar energy transmittance	0.52
WINDOW	
U_w (W/m ² K)	1.3
Water tightness	E1500
Air permeability	Class 4
Resistance to wind load	Class C4*
Sound reduction	34 (-1,-4) dB
Ventilation valve	✓
COLOUR	
Natural wood	✓

* M8A: no performance data

APPLICABLE

- In public and domestic buildings
- In heated, inhabited rooms
- In roof pitch range of 15-55°
- Suitable on all common roofings with proper flashing

FEATURES

- High pivot
- Gas strut assisted
- Laminated internal pane
- Two passive ventilation positions via handle
- Ventilation valve
- Easy installation
- 20 (10+10) year guarantee

MATERIAL / WOOD AND FINISHING

- Kiln-dried laminated pine wood
- Timber from FSC certified forests
- Fungicide protection
- Double layer water-based lacquer

COVER PARTS

- Aluminium, lacquered, RAL 7043

HANDLE

- New, ergonomically designed moulded zinc handle, lacquered

HINGE

- High pivot




TECHNICAL DATA

MEASURES [cm]								
CODE	NOMINAL SIZE	FRAME EXTERNAL SIZE		PANE SIZE		VISIBLE GLASS		
		WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	EFFECTIVE LIGHT AREA m ²
KHV C4A	55x98	55	97,8	39,8	84,9	37,3	79	0.295
KHV F6A	66x118	66	117,8	50,8	104,9	48,3	99	0.478
KHV M4A	78x98	78	97,8	62,8	84,9	60,3	79	0.476
KHV M6A	78x118	78	117,8	62,8	104,9	60,3	99	0.597
KHV M8A	78x140	78	139,8	62,8	126,9	60,3	121	0.729

FLASHING COMPATIBILITY TABLE			ACCESSORIES COMPATIBILITY TABLE			
CODE	SLATE FLASHING	TILE FLASHING	UNIVERSAL FLASHING	BLACKOUT BLIND	ANTI HEAT BLIND	SOLAR ROLLER SHUTTER
KHV C4A	KSF C4A	KTF C4A	KUF C4A	DUA C4A	MIA CXA	SSR C4A
KHV F6A	KSF F6A	KTF F6A	KUF F6A	DUA F6A	MIA FXA	SSR F6A
KHV M4A	KSF M4A	KTF M4A	KUF M4A	DUA M4A	MIA MXA	SSR M4A
KHV M6A	KSF M6A	KTF M6A	KUF M6A	DUA M6A	MIA MXA	SSR M6A
KHV M8A	KSF M8A	KTF M8A	KUF M8A	DUA M8A	MIA MXA	SSR M8A

Please check the combi flashing compatibility table as well.

PANE CONSTRUCTION

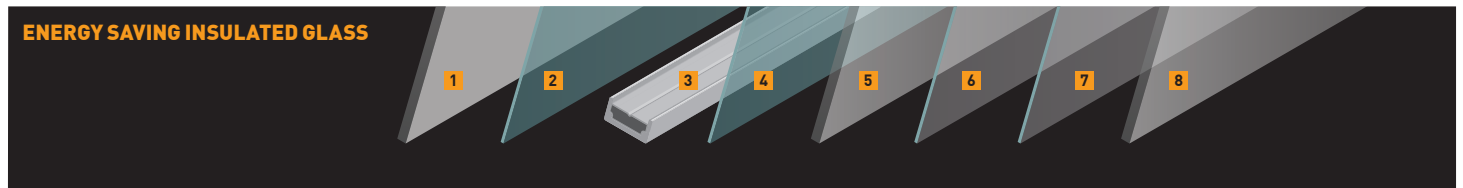

1: 4 mm toughened safety glass 2, 4: Low-E coating [reflects heat] 3: Argon gas filled cavity 5, 8: 3 mm float glass 6, 7: Two layers of tear resistant foil

AVAILABLE SIZES [cm]

C4A	F6A	M4A	M6A	M8A
55x98	66x118	78x98	78x118	78x140



The mark of responsible forestry



www.dakea.com

