

# CONSERVATION

## KCV CENTER PIVOT CONSERVATION ROOF WINDOW



VARIANT	901
<b>PANE</b>	
Construction	4-16-4H
Thickness of glazing (mm)	24
Low E	✓✓
Gas	Argon
Toughened	✓
$U_g$ (W/m <sup>2</sup> K)	1.0
Total solar energy transmittance	0.55
<b>WINDOW</b>	
$U_w$ (W/m <sup>2</sup> K)	1.3
Water tightness	E1350
Air permeability	Class 4
Resistance to wind load	Class C4
Sound reduction	32 [-1,-5] dB
Ventilation valve	✓
<b>COLOUR</b>	
Natural wood	✓



NEXT 20  
GUARANTEE



MAX PROTECT



MASTER WOOD

### APPLICABLE

- In public, domestic buildings, for conservation area and for old buildings (for renovation)
- In heated, inhabited rooms
- In roof pitch range of 15-90°
- Suitable on all common roofings with proper flashing

### FEATURES

- Center pivot
- Black external profiles and black glazing bar
- Extra sliding gasket
- Ventilation valve
- Two passive ventilation positions via handle
- Easy installation
- 10 + 10 year guarantee

### MATERIAL / WOOD AND FINISHING

- Kiln-dried laminated pine wood
- Timber from FSC certified forests
- Fungicide protection
- Double layer water-based lacquer

### COVER PARTS

- Aluminium, lacquered, RAL 9005

### HANDLE

- Ergonomically designed moulded zinc handle, lacquered

### HINGE

- Centre pivot



# TECHNICAL DATA

## MEASURES [cm]

CODE	NOMINAL SIZE	FRAME EXTERNAL SIZE		PANE SIZE		VISIBLE GLASS		
		WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	EFFECTIVE LIGHT AREA m <sup>2</sup>
KCV C4A	55x98	55	97,8	39,8	84,9	37,3	79	0.295
KCV F6A	66x118	66	117,8	50,8	104,9	48,3	99	0.478
KCV M6A	78x118	78	117,8	62,8	104,9	60,3	99	0.597

## FLASHING COMPATIBILITY TABLE

## ACCESSORIES COMPATIBILITY TABLE

CODE	FLUSH FLASHING VINTAGE (BLACK)	PLAIN TILE FLASHING VINTAGE (BLACK)	UNIVERSAL FLASHING VINTAGE (BLACK)	BLACKOUT BLIND	ROLLER BLIND	VENETIAN BLIND	ANTI HEAT BLIND	ROLLER SHUTTER
KCV C4A	KFF C4A VINTAGE	KFP C4A VINTAGE	KUF C4A VINTAGE	DUA C4A	RHA CXA	PAA C4A	MIA CXA	SHA C4A
KCV F6A	KFF F6A VINTAGE	KFP F6A VINTAGE	KUF F6A VINTAGE	DUA F6A	RHA FXA	PAA F6A	MIA FXA	SHA F6A
KCV M6A	KFF M6A VINTAGE	KFP M6A VINTAGE	KUF M6A VINTAGE	DUA M6A	RHA MXA	PAA M6A	MIA MXA	SHA M6A


## PANE 9

Energy saving insulated glass

4-16-4H

$U_g: 1,0 \text{ W/m}^2\text{K}$

$U_w: 1,3 \text{ W/m}^2\text{K}$

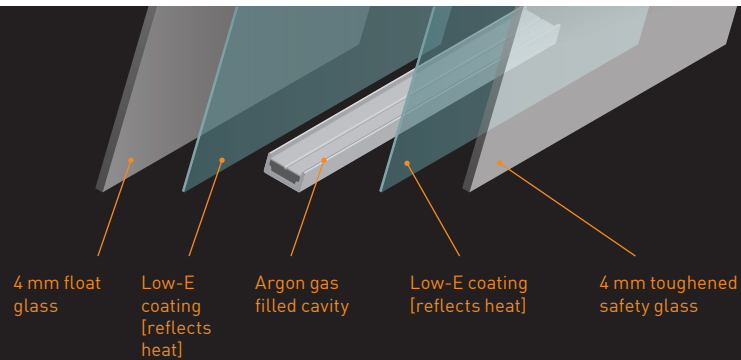

4 mm float glass

Low-E coating [reflects heat]

Argon gas filled cavity

Low-E coating [reflects heat]

4 mm toughened safety glass

## AVAILABLE SIZES [cm]



C4A	F6A	M6A
55x98	66x118	78x118



CE<sup>20</sup>  
EN 14351-1:2006  
+A2:2016

[www.dakea.com](http://www.dakea.com)

